



electronic powersolutions

# CHB150W8 SERIES 150 WATT 8:1 INPUT ISOLATED DC-DC CONVERTER

## Features

- Efficiency Up to 90%
- Fixed Switching Frequency
- Regulated Outputs
- Remote On/Off
- Fully protected (OTP/OCP/OVP/UVLO)
- 1500Vdc I/O Isolation
- Operating Case Temperature -40 to +100°C
- Half Brick Size Meet Industrial Standard  
2.28x2.40x0.50
- UL60950-1 2nd Approval



| MODEL NUMBER   | INPUT VOLTAGE | OUTPUT VOLTAGE | OUTPUT CURRENT |        | INPUT CURRENT |           | % EFF. |      |      | CAPACITOR LOAD MAX.   |
|----------------|---------------|----------------|----------------|--------|---------------|-----------|--------|------|------|-----------------------|
|                |               |                | MIN.           | MAX.   | NO LOAD       | FULL LOAD | (1)    | (2)  | (3)  |                       |
| CHB150W8-36S12 | 9-75 VDC      | 12 VDC         | 0 mA           | 12.5 A | 60 mA         | 4.66 A    | 89.5   | 89.5 | 89.5 | 5000uF                |
| CHB150W8-36S15 | 9-75 VDC      | 15 VDC         | 0 mA           | 10 A   | 60 mA         | 4.63 A    | 90     | 90   | 90   | 5000uF                |
| CHB150W8-36S24 | 9-75 VDC      | 24 VDC         | 0 mA           | 6.25 A | 60 mA         | 4.66 A    | 89.5   | 89.5 | 89   | 2000µF <sup>(4)</sup> |
| CHB150W8-36S28 | 9-75 VDC      | 28 VDC         | 0 mA           | 5.35 A | 60 mA         | 4.63 A    | 90     | 90   | 89.5 | 1500uF <sup>(4)</sup> |
| CHB150W8-36S48 | 9-75 VDC      | 48 VDC         | 0 mA           | 3.13 A | 60 mA         | 4.63 A    | 90     | 90.5 | 89.5 | 1000µF <sup>(4)</sup> |

NOTE:

1. Nominal Input Voltage 36 VDC
2. Measured at 24Vin
3. Measured at 48Vin
4. The output terminal of 24, 28, 48Vout models required a minimum capacitor 100uF to maintain specified regulation
5. The input external capacitor recommend to parallel with 330uF ESR<0.7Ω to reduce the input ripple voltage

## PART NUMBER

| Series    | Nominal Input Voltage | Number of Outputs | Nominal Output Voltage  | Remote On/Off Logic           |
|-----------|-----------------------|-------------------|---|-------------------------------|
| CHB150W8- | II                    | O                 | XX  | L                             |
| CHB150W8  | 36: 36 VDC            | S: Single         | 12: 12VDC<br>15: 15VDC<br>24: 24VDC<br>28: 28VDC<br>48: 48VDC | None: Positive<br>N: Negative |

Part Number Example:

**CHB150W8-36S12N:** Half Brick, 150W, 8:1 9-75Vdc Input, Single 12Vdc Output, Negative Logic

**TECHNICAL SPECIFICATIONS**

(All specifications are typical at nominal input, full load at 25°C unless otherwise noted.)

**ABSOLUTE MAXIMUM RATINGS**

| PARAMETER                  | NOTES and CONDITIONS             | Device | Min. | Typ. | Max. | Units           |
|----------------------------|----------------------------------|--------|------|------|------|-----------------|
| Input Voltage              | Continuous                       | All    | -0.3 |      | 75   | V <sub>dc</sub> |
| Input Surge Voltage        | 100ms max.                       | All    |      |      | 100  | V <sub>dc</sub> |
| Operating Case Temperature | At the Center Part of Base Plate | All    | -40  |      | 100  | °C              |
| Storage Temperature        |                                  | All    | -55  |      | 105  | °C              |

**INPUT CHARACTERISTICS**

| PARAMETER                         | NOTES and CONDITIONS                     | Device                 | Min. | Typ. | Max. | Units            |
|-----------------------------------|--|------------------------|------|------|------|------------------|
| Operating Input Voltage           |  | All                    | 9    | 36   | 75   | V <sub>dc</sub>  |
| Input Under Voltage Lockout       |  |                        |      |      |      |                  |
| Turn-On Voltage Threshold         |  | All                    | 8.5  | 9.0  | 9.5  | V <sub>dc</sub>  |
| Turn-Off Voltage Threshold        |  | All                    | 7.5  | 8.0  | 8.5  | V <sub>dc</sub>  |
| Lockout Hysteresis Voltage        |  | All                    |      | 1    |      | V <sub>dc</sub>  |
| Maximum Input Current             | V <sub>in</sub> =9V, Full Load.          | All                    |      | 20   |      | A                |
| No-Load Input Current             | V <sub>in</sub> =36V, I <sub>o</sub> =0A | See Model Number Table |      |      |      | mA               |
| Input Filter                      | LC filter.                               | All                    |      |      |      |                  |
| Inrush Current (I <sup>2</sup> t) | As per ETS300 132-2.                     | All                    |      |      | 1    | A <sup>2</sup> s |
| Input Reflected Ripple Current    | P-P thru 10uH inductor, 5Hz to 20MHz.    | All                    |      |      | 50   | mA               |
| Recommended Input Fuse            | Fast acting type                         | All                    |      | 30   |      | A                |
| Input Capacitance (External)      | <0.7Ω ESR                                | All                    |      | 330  |      | uF               |

**OUTPUT CHARACTERISTICS**

| PARAMETER  | NOTES and CONDITIONS   | Device                 | Min.                       | Typ. | Max.  | Units |
|--|--|------------------------|----------------------------|------|-------|-------|
| Voltage Set Point Accuracy                               | V <sub>in</sub> =36V, Full Load, T <sub>c</sub> =25°C  | All                    | -1.0                       |      | +1.0  | %     |
| Output Voltage Regulation                                |  |                        |                            |      |       |       |
| Load Regulation  | Full Load to No Load   | All                    |                            |      | ±0.2  | %     |
| Line Regulation  | V <sub>in</sub> =High Line to Low Line, Full Load  | All                    |                            |      | ±0.2  | %     |
| Temperature Coefficient                                  | T <sub>c</sub> =-40°C to 100°C   | All                    |                            |      | ±0.03 | %/°C  |
| Output Voltage Ripple and Noise (5Hz to 20MHz bandwidth) |  |                        |                            |      |       |       |
| Peak-to-Peak   | Full load, 10uF tantalum and 1.0uF ceramic capacitors (for V <sub>o</sub> =48V: Full Load 10uF aluminum and 1uF ceramic capacitors). | 12V <sub>o</sub>       |                            |      | 120   | mV    |
|  |  | 15V <sub>o</sub>       |                            |      | 120   |       |
|  |  | 24V <sub>o</sub>       |                            |      | 280   |       |
|  |  | 28V <sub>o</sub>       |                            |      | 280   |       |
|  |  | 48V <sub>o</sub>       |                            |      | 480   |       |
|  |  |                        |                            |      |       |       |
| RMS.   |  | 12V <sub>o</sub>       |                            |      | 60    | mV    |
|  |  | 15V <sub>o</sub>       |                            |      | 60    |       |
|  |  | 24V <sub>o</sub>       |                            |      | 100   |       |
|  |  | 28V <sub>o</sub>       |                            |      | 100   |       |
|  |  | 48V <sub>o</sub>       |                            |      | 200   |       |
| Output Current Range                                     | V <sub>in</sub> = 9 to 36V   | See Model Number Table |                            |      |       | A     |
| Over Current Protection                                  | <90% V <sub>o</sub>  | All                    | 105                        | 160  | 200   | %     |
| Short Circuit Protection                                 | Hiccup Mode. Auto Recovery.  | All                    | Continuous, Auto Recovery. |      |       |       |
| External Load Capacitance                                | Full load (Constant resistive load)  | See Model Number Table |                            |      |       | uF    |
| Output Voltage Trim Range                                | P <sub>o</sub> ≤ max rated power, I <sub>o</sub> ≤ I <sub>o,max</sub>  | Others                 | -10                        |      | +10   | %     |
|  | V <sub>in</sub> =9-13V, I <sub>out</sub> =max rated current  | 28V <sub>o</sub>       | -10                        |      | 0     |       |
|  | V <sub>in</sub> =13-75V, P <sub>out</sub> =max rated power, I <sub>out</sub> =max rated current                                      | 28V <sub>o</sub>       | -10                        |      | +10   |       |



# CHB150W8 Series

| PARAMETER                         | NOTES and CONDITIONS  | Device | Min. | Typ. | Max. | Units |
|-----------------------------------|---|--------|------|------|------|-------|
| Output Voltage Remote Sense Range | $P_o \leq \text{max rated power}$ , $I_o \leq I_{o\_max}$<br>% of nominal $V_o$ | All    |      |      | +10  | %     |
| Over Voltage Protection           | Limited Voltage, % of Nominal $V_o$   | All    | 115  | 125  | 140  | %     |

## EFFICIENCY

| PARAMETER | NOTES and CONDITIONS   | Device                 | Min. | Typ. | Max. | Units |
|-----------|------------------------|------------------------|------|------|------|-------|
| 100% Load | $V_{in}=24V, 36V, 48V$ | See Model Number Table |      |      |      | %     |

## DYNAMIC CHARACTERISTICS

| PARAMETER                               | NOTES and CONDITIONS   | Device | Min. | Typ. | Max. | Units |
|---|--|--------|------|------|------|-------|
| Output Voltage Current Transient        |  |        |      |      |      |       |
| Error Band                              | 75% to 100% of $I_{o\_max}$ step load change<br>$dI/dt=0.1A/us$<br>(within 1% $V_{out}$ nominal)   | All    |      |      | ±5   | %     |
| Recovery Time                           | $V_{in}=24,36,48V$ ; output Capacitance 100uF,<br>10uF solid tantalum and 1.0uF ceramic capacitors | All    |      |      | 500  | us    |
| Turn-On Delay and Rise Time             |  |        |      |      |      |       |
| Full load (Constant resistive load)     |  |        |      |      |      |       |
| Turn-On Delay Time, From On/Off Control | $V_{on/off}$ to 90% $V_{o\_set}$ , Remote On   | All    |      | 80   | 100  | ms    |
| Turn-On Delay Time, From Input          | $V_{in\_min}$ to 90% $V_{o\_set}$ , Power Up   | All    |      | 100  | 150  | ms    |
| Output Voltage Rise Time                | 10% $V_{o\_set}$ to 90% $V_{o\_se}$  | All    |      | 30   | 50   | ms    |

## ISOLATION CHARACTERISTICS

| PARAMETER  | NOTES and CONDITIONS  | Device         | Min. | Typ.         | Max. | Units    |
|--|---|----------------|------|--------------|------|----------|
| Isolation Voltage<br>(100% factory Hi-Pot tested @2sec.) | 1 minute; Input to Output, input to case,<br>output to case | All            |      |              | 1500 | $V_{dc}$ |
| Isolation Resistance                                     | Input to Output   | All            | 10   |              |      | MΩ       |
| Isolation Capacitance                                    | Input to Output   | 48Vo<br>Others |      | 2500<br>2300 |      | pF       |
|  | Input to Case (Base Plate)                                  | All            |      | 1000         |      |          |
|  | Output to Case (Base Plate)                                 | All            |      | 1000         |      |          |

## FEATURE CHARACTERISTICS

| PARAMETER  | NOTES and CONDITIONS                                       | Device | Min. | Typ. | Max. | Units |
|--|--|--------|------|------|------|-------|
| Switching Frequency  | Output Ripple Frequency                                    | All    | 180  | 200  | 220  | KHz   |
| On/Off Control, Positive Remote On/Off logic, Refer to -Vin pin. |  |        |      |      |      |       |
| Logic Low (Module Off)   | $V_{on/off}$ at $I_{on/off}=1.0mA$                         | All    | 0    |      | 1.2  | V     |
| Logic High (Module On)   | $V_{on/off}$ at $I_{on/off}=0.0uA$ , Pin open=On           | All    | 3.5  |      | 75   | V     |
| On/Off Control, Negative Remote On/Off logic, Refer to -Vin pin  |  |        |      |      |      |       |
| Logic High (Module Off)  | $V_{on/off}$ at $I_{on/off}=0.0uA$ , Pin open=Off          | All    | 3.5  |      | 75   | V     |
| Logic Low (Module On)  | $V_{on/off}$ at $I_{on/off}=1.0mA$                         | All    | 0    |      | 1.2  | V     |
| On/Off Current (for both remote on/off logic)                    | $I_{on/off}$ at $V_{on/off}=0V$                            | All    |      |      | 1    | mA    |
| Leakage Current (for both remote on/off logic)                   | Logic High, $V_{on/off}=15V$                               | All    |      |      | 1    | mA    |
| Off Converter Input Current                                      | Shutdown input idle current                                | All    |      | 12   | 18   | mA    |
| Over Temperature Shutdown  | Temperature at the Center Part of Base Plate, Non-Latching | All    |      | 105  |      | °C    |
| Over Temperature Recovery  |  | All    |      | 95   |      | °C    |



# CHB150W8 Series


## GENERAL SPECIFICATIONS

| PARAMETER                  | NOTES and CONDITIONS  | Device | Min. | Typ. | Max. | Units   |
|----------------------------|---|--------|------|------|------|---------|
| MTBF                       | $I_o=100\%$ of $I_{o\_max}$ ;<br>MIL-HDBK - 217F_Note 1, GB, 25°C | All    |      | 800  |      | K hours |
| Weight                     |   | All    |      | 109  |      | grams   |
| Case Material              | Plastic, DAP, UL 94V-0  |        |      |      |      |         |
| Base plate Material        | Aluminum  |        |      |      |      |         |
| Potting Material           | UL 94V-0  |        |      |      |      |         |
| Pin Material               | Base: Copper<br>Plating: Nickel with Matte Tin                    |        |      |      |      |         |
| Shock/Vibration            | MIL-STD-810F Compliant  |        |      |      |      |         |
| Humidity                   | 95% RH max. Non Condensing  |        |      |      |      |         |
| Altitude                   | 2000m Operating Altitude, 12000m Transport Altitude               |        |      |      |      |         |
| Thermal Shock              | MIL-STD-810F  |        |      |      |      |         |
| EMI                        | Meets EN55032 (with external filter)                              |        |      |      |      | Class A |
| Application Note Link      | <a href="#">CHB150W8-36S Series App Notes</a>                     |        |      |      |      |         |
| Packaging Information Link | <a href="#">Packaging Information</a>                             |        |      |      |      |         |


## CHARACTERISTIC CURVE

### Power Derating Curve


CHB150W8-36S Derating Curve without Heatsink (Vin=36V)

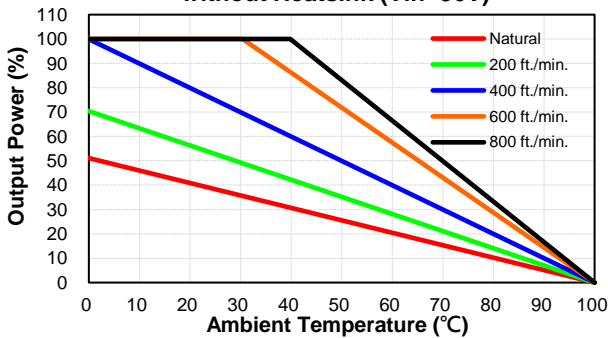


CHB150W8-36S Derating Curve with Heatsink HBT254 (Vin=36V)

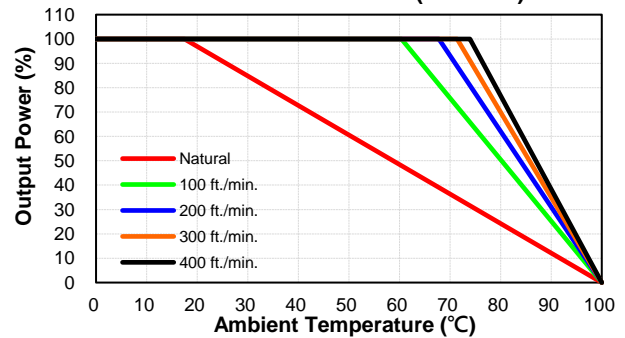

CHB150W8-36S Derating Curve with Heatsink HBT127 (Vin=36V)

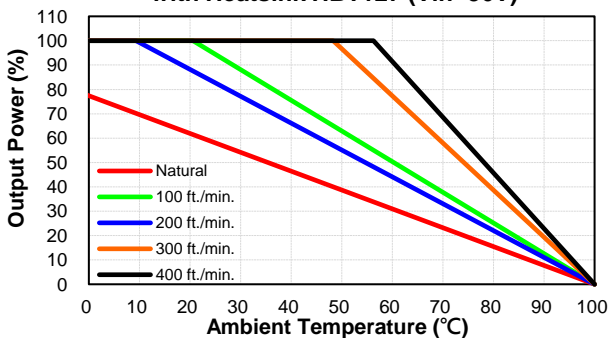

CHB150W8-36S Derating Curve with Heatsink HBL210 (Vin=36V)

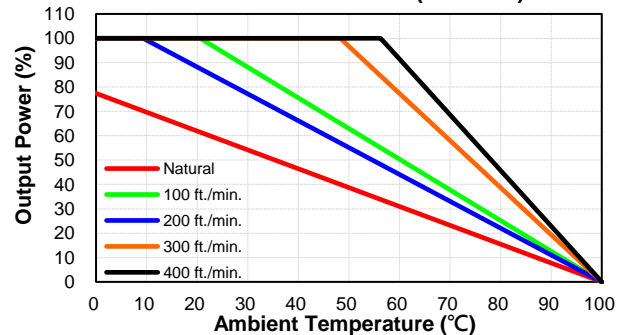





# CHB150W8 Series

## Performance Data


**CHB150W8-36S12**  
Eff Vs Io @25 Deg. C

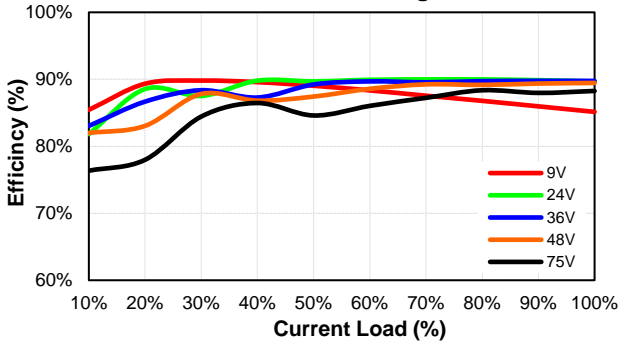


**CHB150W8-36S12**  
Pd Vs Po @25 Deg. C

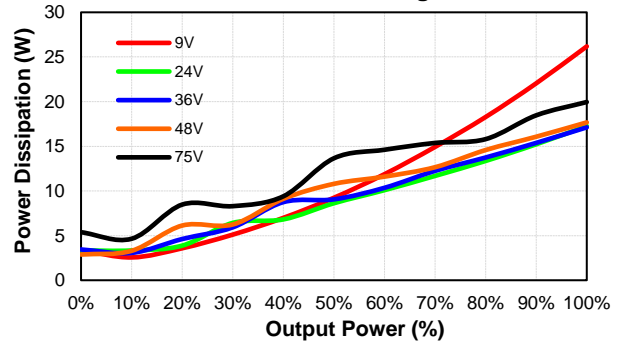


**CHB150W8-36S15**  
Eff Vs Io @25 Deg. C

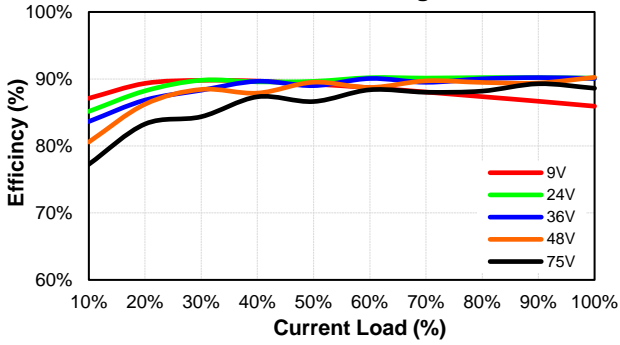


**CHB150W8-36S15**  
Pd Vs Po @25 Deg. C

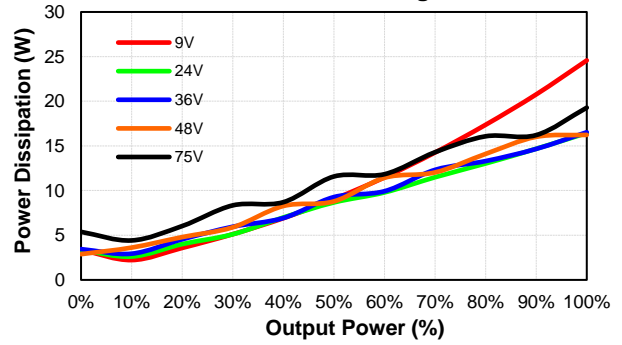


**CHB150W8-36S24**  
Eff Vs Io @25 Deg. C

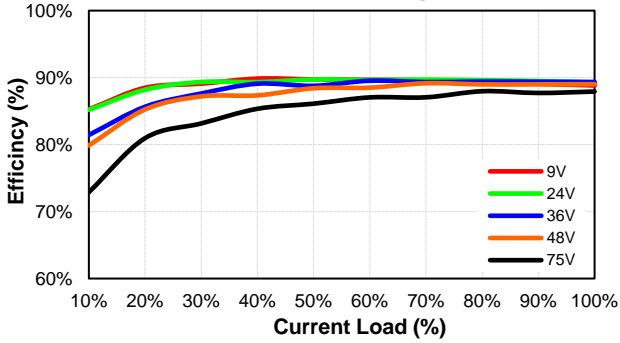


**CHB150W8-36S24**  
Pd Vs Po @25 Deg. C

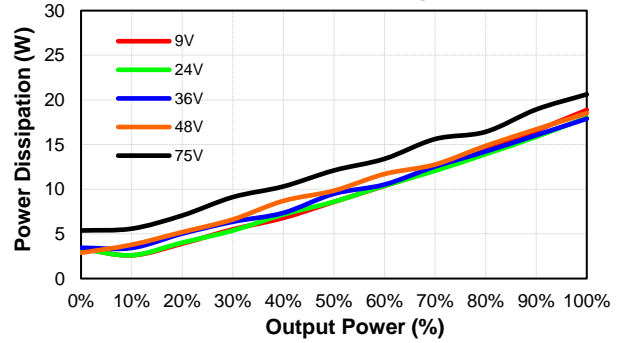

**CHB150W8-36S28**  
Eff Vs Io @25 Deg. C

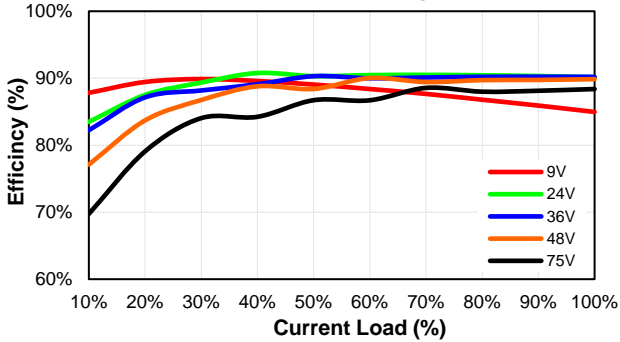


**CHB150W8-36S28**  
Pd Vs Po @25 Deg. C

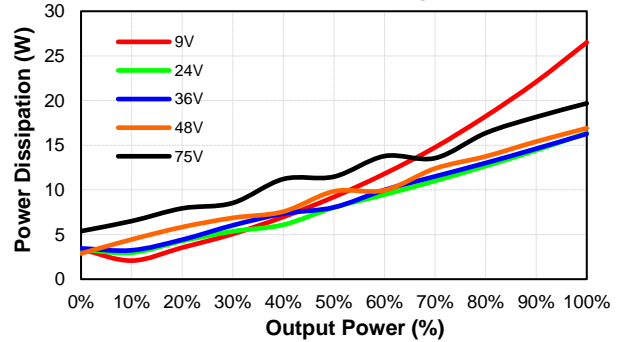




# CHB150W8 Series

**CHB150W8-36S48**  
Eff Vs Io @25 Deg. C

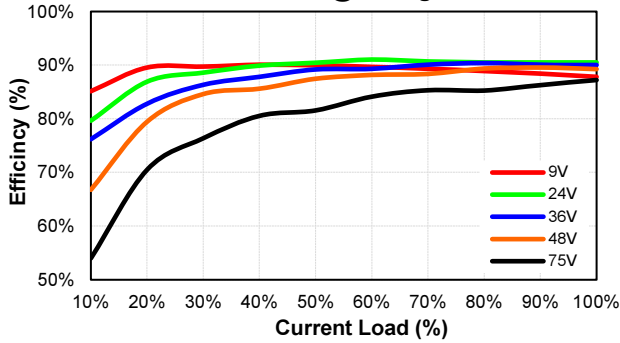

**CHB150W8-36S48**  
Pd Vs Po @25 Deg. C

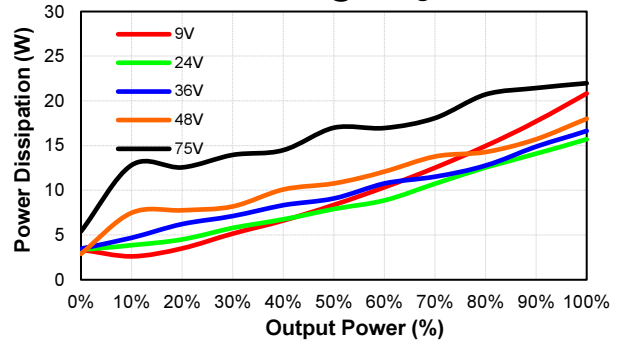


## MECHANICAL SPECIFICATION

CASE HB

All Dimensions In Inches(mm)

Tolerances Inches: X.XX= ±0.02 , X.XXX= ±0.010

Millimeters: X.X= ±0.5 , X.XX=±0.25

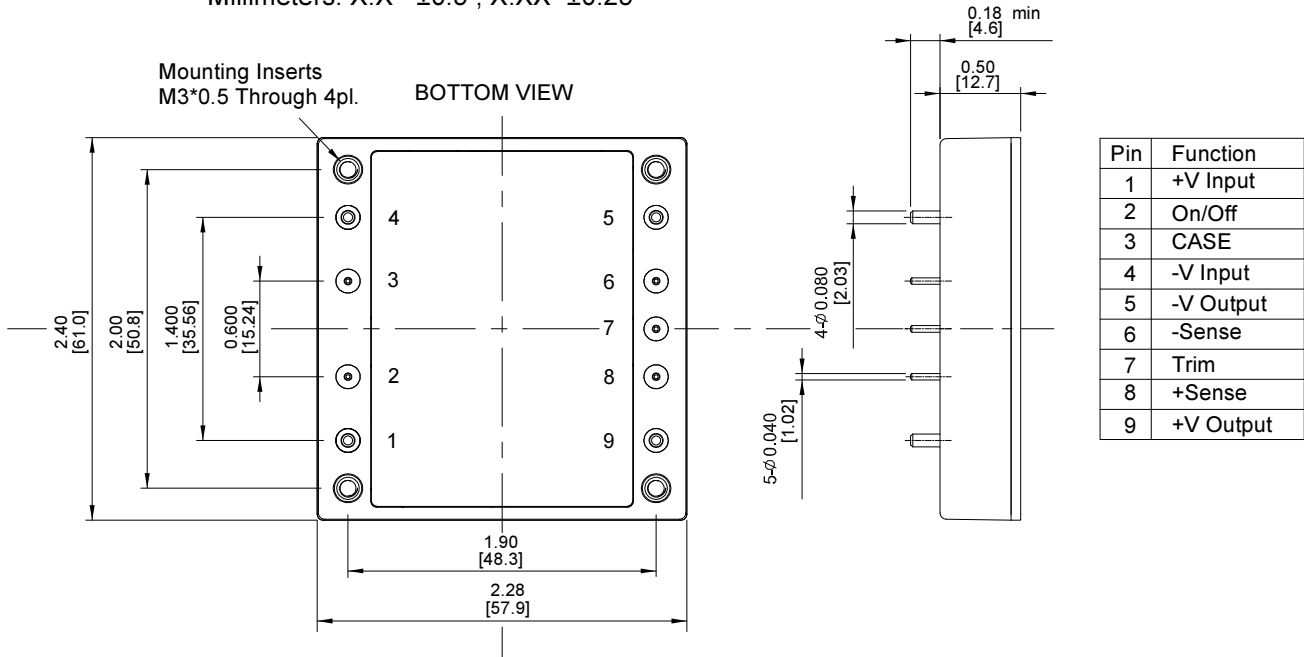

ALL PSU LTD, Unit D6 Laser Quay, Culpeper Close  
Medway City Estate, Rochester, Kent, ME2 4HU

Tel: 01634 725527, Email: sales@allpsu.co.uk, Web: www.allpsu.co.uk