



CQE50W SERIES

50 WATT 4:1 INPUT DC-DC CONVERTERS SINGLE OUTPUT



FEATURES

- * 50W Isolated Output
- * No Tantalum Capacitor Inside
- * Quarter-Brick Size, Six-Sided Shield Metal Case
- * High Efficiency up to 92%
- * 300KHz Switching Frequency
- * 4:1 Input Range
- * Regulated Outputs
- * Continuous Short Circuit Protection
- * Full Load Operation up to 80°C
with Heat-sink QBT210 (M-C421) Natural Convection
- * Over Temperature/Voltage/Current Protection
- * UL60950-1 2nd Approval
- * Safety Meets IEC/EN/UL62368-1



MODEL NUMBER	INPUT VOLTAGE	OUTPUT VOLTAGE	OUTPUT CURRENT		INPUT CURRENT		% EFF.		CAPACITOR LOAD MAX.
			MIN.	MAX.	NO LOAD	FULL LOAD	(2)	(3)	
CQE50W-24S3V3	9-36 VDC	3.3 VDC	0 mA	10 A	100 mA	1528 mA	90	90.5	10000μF
CQE50W-24S05	9-36 VDC	5.0 VDC	0 mA	10 A	100 mA	2277 mA	91	91.5	10000μF
CQE50W-24S12	9-36 VDC	12 VDC	0 mA	4.16 A	100 mA	2261 mA	91	91.5	4160μF
CQE50W-24S15	9-36 VDC	15 VDC	0 mA	3.33 A	100 mA	2287 mA	91.5	91.5	3330μF
CQE50W-24S24	9-36 VDC	24 VDC	0 mA	2.08 A	60 mA	2311 mA	90	90	2080μF
CQE50W-24S48	9-36VDC	48 VDC	0 mA	1.04 A	60 mA	2311 mA	88.5	88.5	1040μF(4)
CQE50W-48S3V3	18-75VDC	3.3 VDC	0 mA	10 A	60 mA	764 mA	90	90	10000μF
CQE50W-48S05	18-75VDC	5.0 VDC	0 mA	10 A	60 mA	1132 mA	91.5	92	10000μF
CQE50W-48S12	18-75VDC	12 VDC	0 mA	4.16 A	60 mA	1130 mA	92	92	4160μF
CQE50W-48S15	18-75VDC	15 VDC	0 mA	3.33 A	60 mA	1144 mA	91	91	3330μF
CQE50W-48S24	18-75VDC	24 VDC	0 mA	2.08 A	60 mA	1156 mA	91	90.5	2080μF
CQE50W-48S48	18-75VDC	48 VDC	0 mA	1.04 A	60 mA	1156 mA	89	89	1040μF(4)

NOTE: 1. Nominal Input Voltage 24, 48VDC

2. Measured at 12VDC for 24SXX, 24VDC for 48SXX

3. Measured at Nominal Input Voltage

4. Require a 10uF Aluminum Capacitor Connected Between +Vout and -Vout for 48Vout Models

SPECIFICATIONS

All Specifications Typical at Nominal Line, Full Load, and 25°C Unless Otherwise Noted

INPUT SPECIFICATIONS:

Input Voltage Range	24V	9-36V
	48V	18-75V
Input Surge Voltage (100ms max.)	24V	50Vdc max.
	48V	100Vdc max.
Under Voltage Lockout	24Vin power up	8.8V
	24Vin power down	8.0V
	48Vin power up	17V
	48Vin power down	16V
Positive Logic Remote On/Off (note 4 & 5)		
Input Filter		PI Type

OUTPUT SPECIFICATIONS:


Voltage Accuracy	±1.0% max.
Transient Response: 75% -100% Step Load Change	
Error Band	±5% Vout
Recover Time	<500us
External Trim Adj. Range	±10%
Ripple & Noise, 20MHz BW (note3)	
3.3V & 5V	40mV RMS, 100mV pk-pk max.
12V & 15V	60mV RMS, 150mV pk-pk max.
24V	100mV RMS, 240mV pk-pk max.
48V	200mV RMS, 480mV pk-pk max.
Temperature Coefficient	±0.03%/°C max.
Short Circuit Protection	Continuous
Line Regulation (note1)	±0.2% max.
Load Regulation (note2)	±0.2% max.
Over Voltage Protection Trip Range, % Vo nom.	115-140%
Current Limit	110% ~165% Nominal Output
Start up Time	20ms typ.

GENERAL SPECIFICATIONS:

Efficiency	See Table
Isolation Voltage	Input/Output 1500VDC min.
	Input/Case 1500VDC min.
	Output/Case 1500VDC min.
Isolation Resistance	10 ⁷ ohm min.
Isolation Capacitance	1000pF typ.
Switching Frequency	300KHz typ.
Operating Case Temperature	-40°C to 105°C
Storage Temperature	-55°C to +125°C
Thermal Shutdown, Case Temp.	110°C typ.
Humidity	95% RH max. Non Condensing
MTBF ... MIL-HDBK-217F. GB. 25°C. Full Load	XXS24. XXS48 ... 800Khrs typ.
	Others ... 600Khrs typ.
Dimensions	1.45 x 2.28 x 0.50 inches(36.8 x 57.9 x 12.7 mm)
Case Material	Aluminum with Non-Conducted Base
Weight	63g

NOTE:

1. Measured from high line to low line.
2. Measured from full load to zero load.
3. Output ripple and noise measured with 10uF aluminum and 1uF ceramic capacitor across output for 48Vout and with 10uF tantalum and 1uF ceramic capacitor for others.
4. Logic compatibility open collector ref to -Input
 Module on >3.5Vdc to 75Vdc or open circuit
 Module off 0 to < 1.2Vdc
5. Suffix "N" to the model number with negative logic remote on/off
 Module on 0 to < 1.2Vdc
 Module off >3.5Vdc to 75Vdc or open circuit

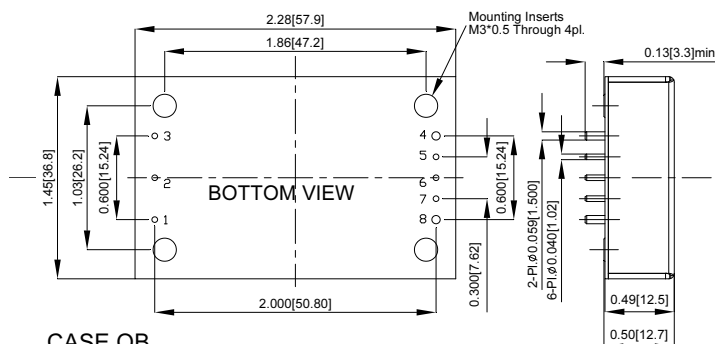


CASE QB


All Dimensions In Inches(mm)
 Tolerances Inches: X.XX= ±0.02 , X.XXX= ±0.010
 Millimeters: X.X= ±0.5 , X.XX= ±0.25

PIN CONNECTION	
Pin	Function
1	+V Input
2	On/Off
3	-V Input
4	-V Output
5	-Sense
6	Trim
7	+Sense
8	+V Output

REMOTE ON/OFF CONTROL

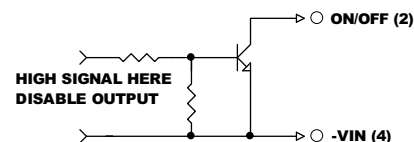

External Output Trim

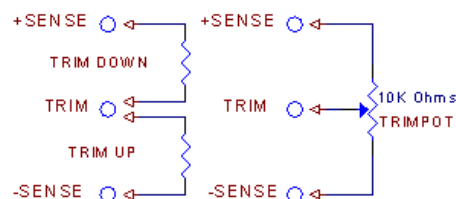

Typical Derating Curve

