

FM SERIES

5 AMP

FILTER MODULE

CE

FEATURES

- * Quarter-Brick Size Meet Industrial Standard
- * PCB Mount
- * 5A Filter Module
- * 200VDC Input Voltage Maximum
- * All Capacitors are Multi-Layer Ceramic
- * Fire & Smoke Meets EN45545-2



MODEL NUMBER	INPUT VOLTAGE	INPUT SURGE VOLTAGE	RATED CURRENT (INPUT to OUTPUT)	DC RESISTANCE (+Vin to +Vo)	DC RESISTANCE (-Vin to -Vo)
FM05D200P	200 VDC max.	250 VDC max.	5 A max.	34 mΩ typ.	34 mΩ typ.

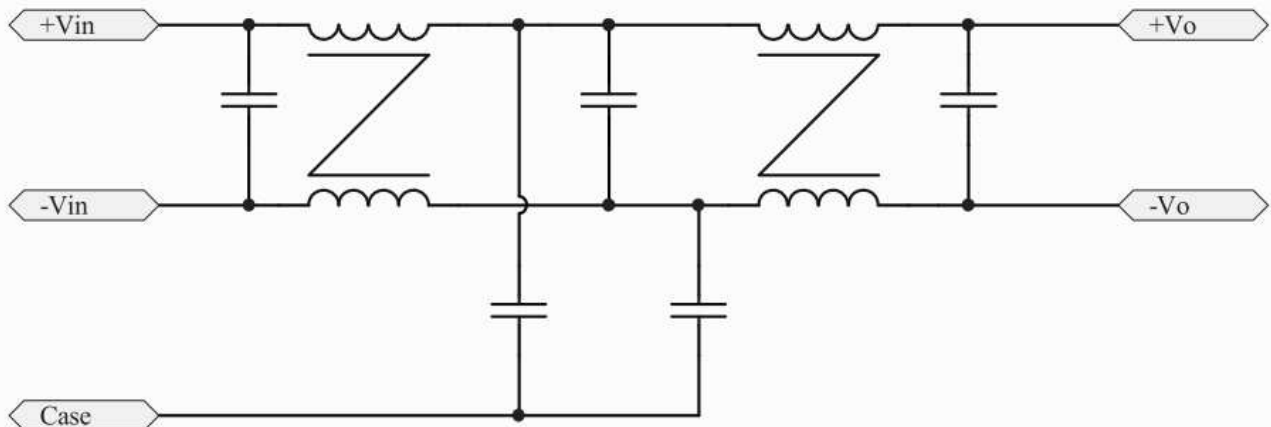


Figure1 Internal Schematic for FM05D200P Module

SPECIFICATIONS

All Specifications Typical At Nominal Line, Full Load, and 25°C Unless Otherwise Noted

INPUT SPECIFICATIONS:

Input Voltage Range 200Vdc max.
 Input Surge Voltage 250Vdc/1s
 Input Rated Current (note 1) 5A max




GENERAL SPECIFICATIONS:

Isolation Voltage (Input/Case, Output/Case) 2250Vdc min.
 1500Vac min.
 Isolation Resistance ... (Input/Case, Output/Case) .. 10⁸ohm min
 DC Resistance See Table
 Operating Case Temperature Range (note 1) -40°C to +110°C
 Storage Temperature Range -55°C to +110°C
 Dimensions 2.28x1.45x0.50 inches (57.9x 36.8x12.7 mm)
 Case Material Aluminum Base-Plate with Plastic Case

NOTE:

1. Maximum case temperature under any operating condition should not exceed 110°C.

Typical Derating Curve

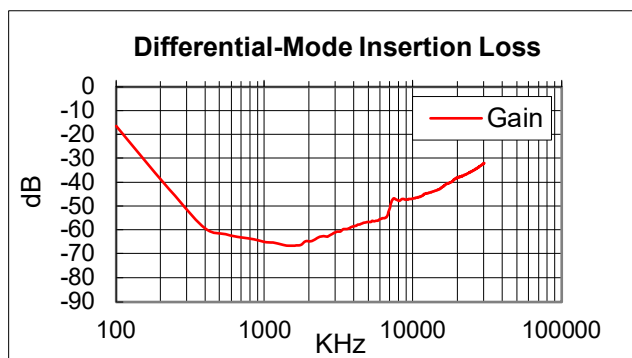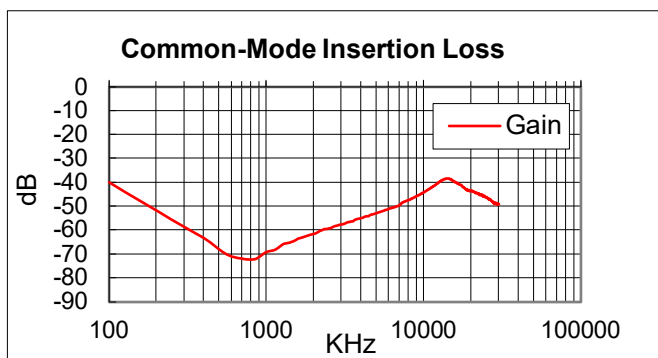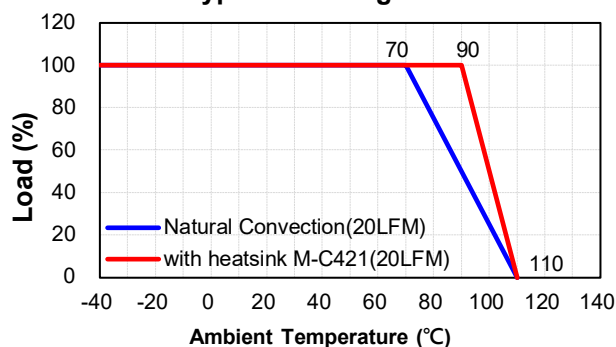


Typical common-mode and differential-mode insertion loss

All Dimensions In Inches (mm)

Tolerance Inches: X.XX= ±0.02 , X.XXX= ±0.010

Millimeters: X.X= ±0.5 , X.XX=±0.25

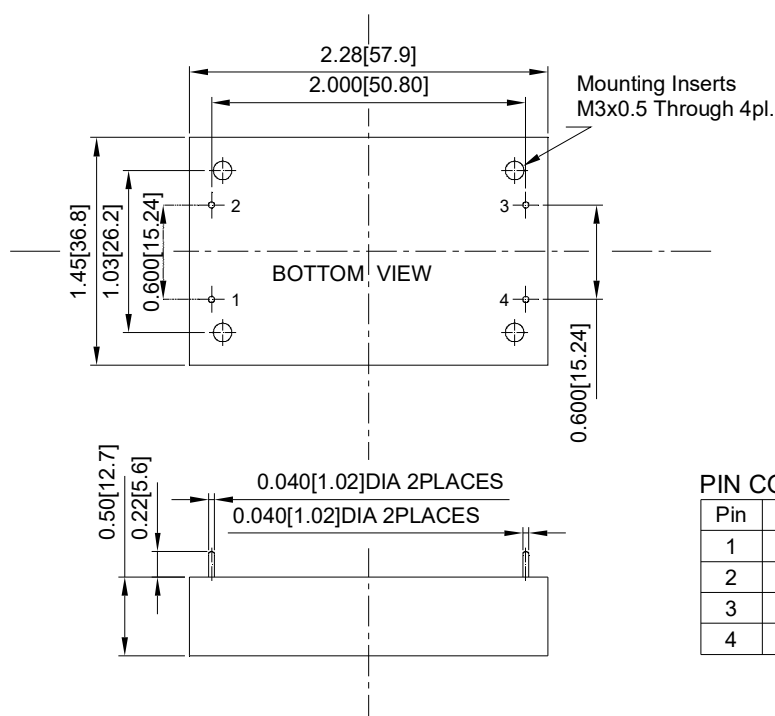

PIN CONNECTION

Pin	Function
1	+V Input
2	-V Input
3	-V Output
4	+V Output

Specifications are subject to change without notice, E&OE. ALL PSU Terms & Conditions apply.

ALL PSU Ltd, Unit D6 Laser Quay, Culpeper Close, Medway City Estate,
 Rochester, Kent, ME2 4HU, Tel : 01634 725527, Fax : 01634 739111
 Email: sales@allpsu.co.uk, Web: www.allpsu.co.uk